

(SAY "AS-PEAS" FAST AND YOU'VE SAID IT RIGHT!)

ASPES CROSS 125 CC-24 HORSES AT THE WHEEL

Just Add Numbers And Go Winnin'

RIDERS / DEALERS:

If you're thinking about a 125 cc Championship this year, better order your Aspes now!



As pes (as' peas) n. Championship 125 cc motorcycle. Born on the Continent, educated in the woods. Speaks "winning" fluently.

SPECIFICATIONS

DISPLACEMENT

Aspes 125 CC Cross

ENGINE TYPE Deeply finned aluminum alloy. Single cylinder

123.6 cc

alloy. Single cylinder (cast-iron liner) 5-port, piston ported 2-stroke

BORE & STROKE 54 x 54 mm

COMPRESSION RATIO 11:1

CARBURETION 29 mm concentric
HP 24 (at the wheel)
CLUTCH In oil, multi-disc

PRIMARY DRIVE Straight cut gears 3.57:1

FINAL DRIVE Chain—#428

Engine sprocket

12-tooth

Rear Wheel sprocket,

alloy 54-tooth

GEAR RATIOS 1 1.77:1 2 1.17:1

3 1.00:1 4 0.85:1 5 0.72:1

AIR FILTRATION

Paper element in watertight fiberglass breathing box

ELECTRICAL SYSTEM Electronic ignition

6-volt,

no lighting coil

LUBRICATION Pre-mix

FUEL RECOMMENDED Premium

OIL RECOMMENDED

Castrol (or equivalent)

FRAME DO

2 gallons

Double downtube, full

cradle, fully braced and

lightened—high strength steel, roller bearing neck

SUSPENSION Front

Front Aspes 32 mm telescopic front forks, chrome moly tubing, Hot-melt forged superdural Avional

crown and brace.

Rear Swingarm with nonprogressive girling

shocks—2 position

TIRES Front 2.50 x 21 cross

Rear 3.50 x 18 cross

WHEELS Front Special strength

Front Special strength-ribbed Borrani crossaluminum alloy

Rear Special strength-ribbed Borrani crossaluminum alloy

DIMENSIONS:

Wheelbase Seat Height Weight

53.6 inches 29.0 inches 210 lbs.

BRAKES Front Internal Expanding


Rear Internal Expanding

FENDERS Aluminum alloy, shock mounted



24 Horsepower/11:1 Compression
ASPES CROSS 125 CC

19 Horsepower/9:1 Compression
ASPES ENDURO 125 CC

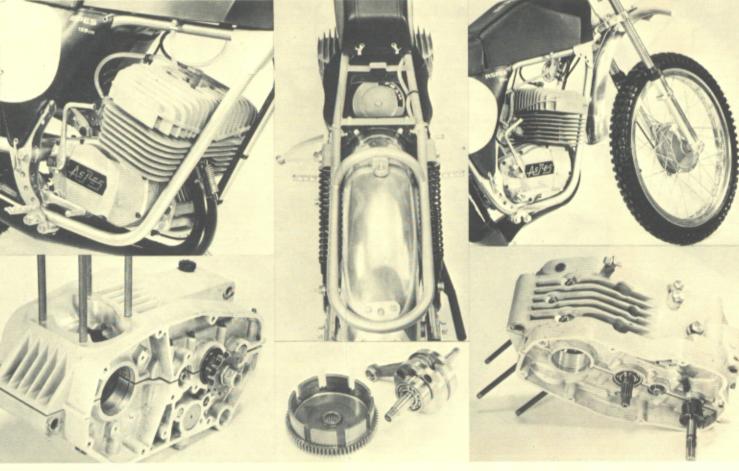


OUT OF THE BOX AND INTO THE WINNER'S CIRCLE

FULLY READY TO RACE WITH THESE STANDARD COMPETITION FEATURES

Special Cross Rims
Forged Fork Clamps
Roller Bearing Fork Neck
Lightened/Braced Frame
Fold-up Pegs

Ball End Controls
Gum Rubber Grips
Left or Right Shift/Brake
Swing-out Kick Start

Shock Mounts Throughout



COOLEST HEAD EVER!

The unique Aspes head design provides super-cooling in the most grueling events. Run full-bore for an hour or more and you can still hold your hand on the head comfortably!

Head measures 12-5/16 x 7-7/8 x 3"

Head measures 12-5/16 x 7-7/8 x 3"
—with twenty-one fins on the top surface.

Twin Fuel Feed
Watertight Breathing Box
Non-Progressive Shocks
Boxed-in Teflon
Chain Guide
Electronic Ignition
Horizontally Split Cases
Extra Deep Finning
Broad Power,—
5,000-9,000 rpm
MotoCross Chest Pad

Number Skirts

SPECIFICATIONS Aspes 125 CC Enduro

ENGINE TYPE

Deeply finned aluminum alloy. Single cylinder (cast-iron liner) 5-port,

 DISPLACEMENT
 123.6 cc

 BORE & STROKE
 54 x 54 mm

COMPRESSION RATIO 9:1

CARBURETION 29 mm concentric

HP 19 (at the wheel)
CLUTCH In oil, multi-disc

PRIMARY DRIVE Straight cut gears 3.57:1
FINAL DRIVE Chain—#428

Engine sprocket
12-tooth
Rear Wheel sprocket,
alloy 54-tooth

piston ported 2-stroke

GEAR RATIOS 1 1.77:1 2 1.17:1 3 1.00:1 4 0.85:1

5 0.72:1

AIR FILTRATION Paper element in

watertight fiberglass breathing box

ELECTRICAL SYSTEM Electronic ignition
30-watt 7-amp batt

30-watt, 7-amp battery, magneto

FUEL RECOMMENDED Premium
OIL RECOMMENDED Castrol (or equivalent)

FUEL CAPACITY 2 gallons
FRAME Double do

Double downtube, full cradle, fully braced and lightened—high strength steel, roller

tubing, Hot-melt forged

bearing neck

SUSPENSION Front Aspes 32 mm telescopic front forks, chrome moly

superdural Avional crown and brace.

Rear Swingarm with nonprogressive girling shocks—2 position

TIRES Front 2.50 x 21 cross

Rear 3.50 x 18 cross

WHEELS Front Special strength-ribbed Borrani cross-aluminum alloy

Rear Special strength-ribbed Borrani crossaluminum alloy

DIMENSIONS:

Wheelbase Seat Height Weight

53.6 inches 29.0 inches 218 lbs.

Weight 218 lbs.

BRAKES Front Internal Expanding

Rear Internal Expanding
FENDERS Aluminum alloy,

shock mounted

© 1973 Engine Specialties, Incorporated

WITH AN ASDCS IN YOUR NECK OF THE WOODS THINGS WON'T EVER BE THE SAME AGAIN.

Importer For U.S.A., Canada, Central and South America

BRONCCO DIVISION / ENGINE SPECIALTIES, INCORPORATED • P.O. Box 260—Cornwells Heights, Pennsylvania 19020 (215) 785-3232